

# Hydraulic Modelling of the Ngongotaha Stream

Prepared by Peter West, Environmental Engineer



Environment Bay of Plenty  
Operations Publication 2005/10  
May 2006

5 Quay Street  
P O Box 364  
Whakatane  
NEW ZEALAND

ISSN 1176 - 5550

## Acknowledgements

Rotorua District Council recorded the flood levels from the May 1999 event and some from January 1986. NIWA operate the river gauge on the Ngongotaha at State Highway 5, and provided the historical stage data and flow ratings. David Marvin carried out the surveying with help from Peter Vercoe and myself. The hydrological flow magnitude frequency analysis was carried out by Peter Blackwood.

Cover Photo: Erosion of the Right bank upstream of Ngongotaha Bridge following the 5 January 1986 flood event.

## Contents

<b>Chapter 1: Introduction</b> .....	1
<b>Chapter 2: Model Layout</b> .....	3
2.1 Model Software.....	3
2.2 Surveyed Cross Sections .....	3
2.3 Floodways .....	3
2.4 Bridges .....	3
2.5 Stream Mouth .....	4
2.6 File Storage .....	5
<b>Chapter 3: Hydrology</b> .....	11
3.1 Hydrograph Shape.....	11
3.2 Design Flows .....	11
3.3 Lake Level .....	13
<b>Chapter 4: Calibration</b> .....	15
4.1 Calibration Events.....	15
4.1.1 <i>Event of 17 December 2005</i> .....	15
4.1.2 <i>Event of 1 May 1999 at 23.5 m<sup>3</sup>/s</i> .....	16
4.1.3 <i>Event of 5 January 1986 at 44 m<sup>3</sup>/s</i> .....	17
<b>Chapter 5: Results</b> .....	23
5.1 Model outcomes .....	23
5.2 Spill potential at Brake Road .....	23
<b>References</b> .....	31



## Chapter 1: Introduction

---

The Ngongotaha Stream drains some 77 square kilometres of land including the Northern slopes of Mount Ngongotaha and part of the Mamaku Plateaux. It discharges into Lake Rotorua several kilometres north of Rotorua City. The bed and banks over the modelled reaches consist mainly of loose, lightweight pumicious soils, and the stream has a pronounced meander plan form. There is a significant bed load of sand and gravel sized particles even at medium to low flows. In places armouring has been installed to fix the stream's location.

A flood control scheme was built in the lower 740m in 1985 by the then Bay of Plenty Catchment Commission. This involved stopbanks and flood spillways across several meander bends. In 1987 they let a contract for stream widening and clearing of vegetation for the remaining 4800 m to State Highway 5. A community led programme of clearing willow and blackberry and planting native grasses and trees has been underway since about 2001. These works have all had significant impacts on the hydraulic characteristics of the stream, and must be taken into account during modelling.

This investigation initially focused on the lower 1.5 km of stream channel, to about Te Manga Place, but was extended upstream to State Highway 5, following concerns about potential spilling at Brake Road during 1% AEP events.



## Chapter 2: Model Layout

---

### 2.1 Model Software

The model was constructed within the Mike 11 software from DHI. This is recognised throughout New Zealand as a comprehensive 1 dimensional hydraulic modelling package. It is capable of modelling dynamic boundary conditions over a complex network of branches. Essentially the programme solves the discharge/head relationship between every connected node point for each time step. It has the capacity to carry out a range of standard bridge, culvert or weir calculations.

### 2.2 Surveyed Cross Sections

The model layout including cross section locations is shown in Figure 1 and Figure 2. This model was initially constructed to extend from Lake Rotorua upstream to about Te Manga Place. A survey of this reach was completed in early 2004. However following a request to investigate the potential for spilling further upstream, the model was extended by adding a further 4 cross sections near Brake Road, surveyed in mid 2005.

Cross sections were then added from file (1986) for the reach from State Highway 5 to Te Manga Place not including that covered with the 2005 survey cross sections. These older cross sections were checked where possible to confirm that they adequately represent the present situation.

### 2.3 Floodways

The model includes six designated floodways, that augment the channel's conveyance during high flows. In most cases these are purpose built structures across the neck of a horseshoe-type bend, with rock riprap erosion protection where required. These are shown in Figure 1. Two overland flow paths were also incorporated near brake road as shown of Figure 2. These are naturally low river terraces, not a designated floodways. Floodway roughnesses were selected based on recognised hydraulic texts (Chow; Henderson). Floodways that experienced depths greater than 2m during 1% AEP flows were assigned Manning's n of 0.08. Those with depths less than this were modelled at  $n=0.10$ . Sensitivity analyses showed that the model results were largely insensitive to floodway roughness.

### 2.4 Bridges

There are seven bridges across the Ngongotaha Stream within the modelled length. Of these, the Ngongotaha Road Bridge and the Railway Bridge were analysed to estimate the head loss during design flows. A pier-drag analysis was carried out by the Yarnell

Method using the *Hybrid* software by Barnett Consultants Ltd (Barnett Consultants, 1992). Output was checked by hand calculations. The piers were assumed to carry debris loads of 1.2m wide, in addition to their constructed width, for their full height. The soffits were lowered by 0.6m to represent a floating debris raft.

It was found that during a 1% AEP flow, the Railway Bridge has 0.95m freeboard and causes less than 30mm head loss. This head loss causes a localised backwater effect limited to a short distance upstream. The Rail Bridge was therefore not included in the model network.

Even with the high debris load, the Ngongotaha Road Bridge was found by this method to cause backwater effects of less than 100mm. This is because the bridge abutments do not significantly constrict the flow and there is only one pier.

Floodwaters are expected to reach the Ngongotaha Road bridge beams during flows larger than about 43 m<sup>3</sup>/s. They reach to within the 600mm debris zone for all the design flows simulated. For this reason the bridge was modelled as a Mike 11 culvert to simulate the closed section. The section widths, used to define the culvert geometry, were reduced by 1.7m – the width of the pier debris raft, and the model results were checked against the hand calculations. Simulation shows that floodwaters will not overflow the roadway, but do come within 0.2 metres of the road crest during a 1% AEP flow.

The remaining five bridges were inspected and, due to their perceived relative effect on the flow, considered to be adequately represented within the general channel roughness.

## 2.5 Stream Mouth

The Ngongotaha Stream has built a large fan of sediment at its mouth out into Lake Rotorua, that is covered by less than one metre depth of water for about one hundred metres out. This was represented in the model by adding additional cross sections at 70 and 115 metres downstream of the stream mouth. These are simply rectangular in shape with widths based on a 60 degree flow separation/dissipation angle. The invert levels of these cross sections were taken from Environment Bay of Plenty's harbour sediment study (Lake Rotorua, Site 4, June 2003). It was found that the model was relatively insensitive to moderate changes in the dissipation angle selected.

During low flows a sand bar is formed across the mouth by lake wave action. This has a dramatic effect on model results. This bar was not included in the final model as it was considered that it would scour during the early phases of a large flow event.



## 2.6 File Storage

The model is stored on the Environment Bay of Plenty network drives at: Jupiter\Designgroup\MikeZero\Upper\_Kaituna\Ngongotaha\Ngongotaha05PMW. The files used are outlined in Table 1 below.

*Table 1: Files Used in the Model*

Simulation	Sim File	Network	Cross sections
17/12/05 Calibration	Calib051217	Net1.nwk11	XSec1.xns11
1% AEP	Ngo1%AEP_L=280.3.sim11	Net1.nwk11	XSec1.xns11
2% AEP	Ngo2%AEP_L=280.3.sim11	Net1.nwk11	XSec1.xns11
5% AEP	Ngo5%AEP_L=280.1.sim11	Net1.nwk11	XSec1.xns11
10% AEP	Ngo10%AEP_L=280.1.sim11	Net1.nwk11	XSec1.xns11

Simulation	Boundary Conditions	HD Parameters	Results
17/12/05 Calibration	Calib05.bnd11	HDPar1.HD11	Calib05.RES11
1% AEP	1%AEP_L280.3.bnd11	HDPar1.HD11	1%AEP_L280.3.RES11
2% AEP	2%AEP_L280.3.bnd11	HDPar1.HD11	2%AEP_L280.3.RES11
5% AEP	5%AEP_L280.1.bnd11	HDPar1.HD11	5%AEP_L280.1.RES11
10% AEP	10%AEP_L280.1.bnd11	HDPar1.HD11	10%AEP_L280.1.RES11





Figure 1: Model Layout: Cross Sections 2004-1 to 1986-3103





Figure 2: Model Layout: Cross Sections 1986-3103 to 1986-5710

## Chapter 3: Hydrology

### 3.1 Hydrograph Shape

The storm of May 1996 produced a roughly rectangular rainfall hyetograph of similar duration as the Ngongotaha Stream's time of concentration to State Highway 5. The peak flow recorded for that event was  $41.3 \text{ m}^3/\text{s}$ . The hydrograph for this storm was used for the upstream boundary condition for the design simulations. It was adjusted proportionally by peak flow. It was also used for the 1999 calibration simulation because the gauge failed to record a large part of that event's hydrograph. The 1996 hydrograph is shown in Figure 3, along with the hourly rainfall depths from the two nearest automatic raingauges, Whakarewarewa (12 km from catchment centroid) and Kararoa (18 km).

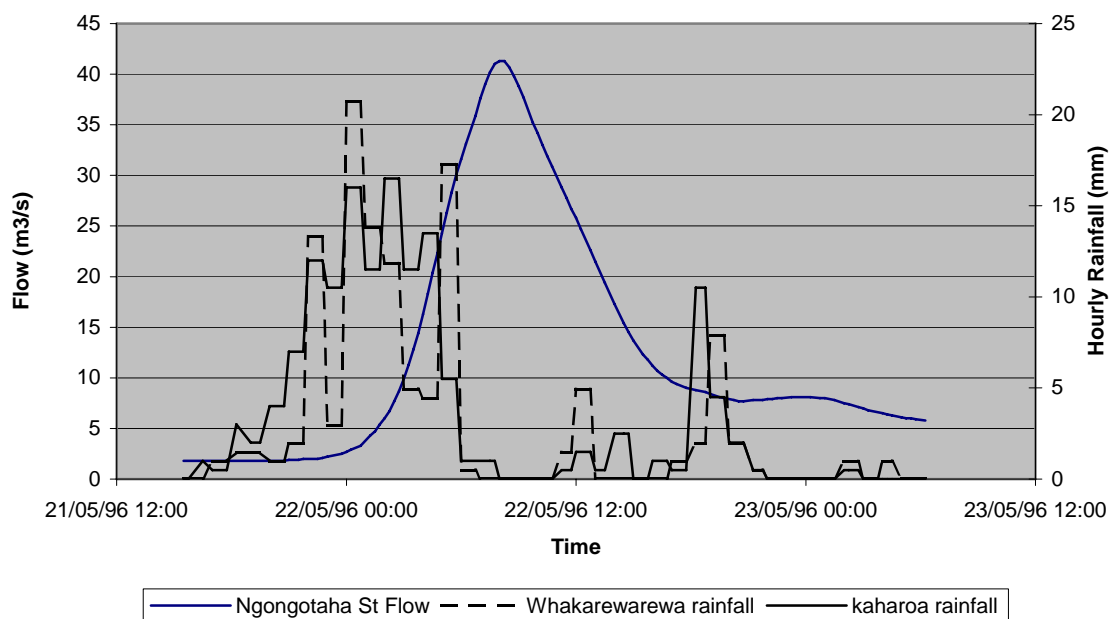


Figure 3: Hourly Rainfall and Ngongotaha Flow for 22 May 1996 Event

### 3.2 Design Flows

NIWA have operated a river gauge on the Ngongotaha Stream at State Highway 5 since May 1975. The hydraulic control at the site is by the natural river bed in a sub-critical flow regime. Flow gauging has been carried out during high flows to determine and update a stage - flow relationship, or rating.

The design flows used in this investigation were determined by fitting annual maxima from January 1976 to December 2000 to an EV1 distribution by the method of L-Moments (Environmental Report 2001/01). Table 2 gives the design flows that were used as the model's upstream boundary.

Table 2: Design Flows for Ngongotaha Stream at State Highway 5

Annual Exceedance Probability	Design Flow m <sup>3</sup> /s
1%	67.0
2%	60.0
5%	43.0
10%	36.8
20%	30.2

A parameter-type hydrological catchment analysis by TM61 and Rational methods was carried out as a check (Appendix1). Back calculation from the May 1996 storm data (Figure 3 above) shows that the catchment is very absorbent ( $Wic$  approx = 0.5;  $C = 0.18$ ) with a longer than expected time of concentration (1.8 times the Ramser-Kirpich method estimate).

Compared with NIWA's HIRDS design rainfall data for durations equal to the time of concentration, the 1996 rainstorm recorded as at Whakarewarewa and Kaharoa was only of about 20% AEP magnitude. However it produced a peak flow of 41.3 m<sup>3</sup>/s in the Ngongotaha Stream which suggests that the rainfall in this catchment was more intense. This in turn gives ground surface parameters of greater permeability.

Alternatively, the 1996 flow in the Ngongotaha could be considered a 20%AEP flow event based on rainfall data (although considered a 5%AEP event on historical river gauge data). Unfortunately, with no rain-gauge data available closer to the catchment, no conclusion can be made. The design flow magnitudes from the river gauge analysis were therefore retained. Further work could be done here to review other historic storm events with suitable duration rainstorms. Also a search for rainfall data within the Ngongotaha Catchment for the May 1996 storm would be beneficial.

The upstream boundary of the hydraulic model is located at the river gauge. For the general model simulations, no lateral inflows were included to represent flows from the catchments that contribute downstream of State Highway 5. This was due to the small areas involved, proportional to the wider catchment. In a subsequent analysis to determine an incremental effect of land development, it was found that flows from these additional catchments could increase peak water levels in the river by something in the order of 30mm (West, June 2005). These effects were found to occur over short reaches near the inflow locations.

### 3.3 Lake Level

The downstream boundary condition of the model is the water level in Lake Rotorua. This level is controlled by a stop-log weir on the Ohau Channel at Mourea and to some extent by wind effects. The conditions leading to a large magnitude flow event in the Ngongotaha Stream are also likely to cause high levels in Lake Rotorua. Therefore event combinations were used as prescribed in Environment Bay of Plenty's *Hydrological and Hydraulic Guidelines* (Guidelines 2001/01). These are shown in Table 3. The lake level frequency distribution is from Environment Bay of Plenty's data summaries (Environmental Report 2001/01). Sensitivity analyses showed that the model is virtually insensitive to changes to lake levels within the range shown here.

Table 3: Design event probability combinations and levels in Lake Rotorua

Design Event AEP	Lake Level AEP	Lake Level
%	%	m Moturiki Datum
1%	5%	280.3
2%	5%	280.3
5%	50%	280.1
10%	50%	280.1
20%	50%	280.1





## Chapter 4: Calibration

---

Until the December 2005 storm, calibration data for the Ngongotaha Stream was very scarce. The draft modelling report of October 2005 shows the attempt to calibrate the model on the 1999 and 1986 events. The work indicated that further data was required to adequately calibrate the reach upstream of Ngongotaha Road that had undergone extensive channel clearing since 2001.

### 4.1 Calibration Events

Flood level records were available for three storm events:

- 17 December 2005 at 33 m<sup>3</sup>/s
- 1 May 1999 at 23.5 m<sup>3</sup>/s
- 5 January 1986 at 44 m<sup>3</sup>/s

The large event of 22 May 1996 (42m<sup>3</sup>/s) appears to have passed without serious flooding or erosion damage. No reference to this event was found during the file review. It must be noted that the 1999 event was remembered more for damage to the shorter urban catchments in Rotorua City than for damage in the Ngongotaha area, and the 1986 event was mostly noted for damage to the road bridge abutments. It is therefore conceivable that a 42 m<sup>3</sup>/s event could pass in 1996 without attracting much attention.

#### 4.1.1 Event of 17 December 2005

The model has been calibrated against the 17 December 2005 flow event. This was measured at 33 cumecs at the State Highway 5 river gauge. The calibration reveals the dramatic reduction in hydraulic resistance achieved by the extensive channel clearing works begun in 2001 on the reach upstream of Ngongotaha Road. The 1999 event levels showed Manning's n values on this reach to be as high as 0.17. The 2005 event indicated that the roughness here had dropped to 0.06.

The calibration graph for this event is shown in Figure 4 on page 19, and a summary is included in Table 4 below.

Table 4: Calibration Summary for 17 December 2005 Event

XS name	Chainage	Recorded Level	Model Level	Error
	m	m	m	m
04X-S 2	136	280.16	280.58	0.42
04X-S 3	225	280.40	280.83	0.43
04X-S 4B	409	281.05	281.11	0.06
04X-S 5	538	281.37	281.48	0.11
04X-S 6	601	281.43	281.67	0.24
04X-S 7	672	281.57	281.80	0.23
04X-S 8	721	281.79	281.85	0.06
04XS 9	817	281.94	282.01	0.07
04X-S 11	1010	282.05	282.25	0.20
04X-S 12	1090	282.30	282.37	0.07
04X-S 14	1144	282.36	282.48	0.12
04X-S 16	1276	282.58	282.73	0.15
04X-S 18	1424	282.97	282.98	0.01
04X-S 19	1530	282.23	283.15	0.92
04X-S 21	1664	283.10	283.34	0.24
04X-S 23	1804	283.72	283.49	0.23
04X-S 25	1933	283.64	283.69	0.05
04X-S 27	2039	283.75	283.86	0.11
04X-S 28	2107	283.96	283.91	0.05
04X-S 29	2208	284.02	284.04	0.03
04X-S 31	2356	284.27	284.21	0.06
04X-S 34	2647	284.30	284.41	0.11
04X-S 36	2757	284.45	284.54	0.09
04X-S 37	2832	284.47	284.57	0.10
04X-S 38	2909	284.58	284.62	0.04
04X-S 41	3204	284.67	284.91	0.24
86xs3948	4088	286.40	286.56	0.16
05xs42b	4723	287.56	287.60	0.04
05xs43b	4859	287.95	287.96	0.01
05xs43	4983	288.22	288.21	0.02
05xs43c	5060	288.26	288.30	0.04
86xs5633	5773	289.50	289.66	0.16
			<b>average absolute error.</b>	<b>0.15</b>

#### 4.1.2 Event of 1 May 1999 at 23.5 m<sup>3</sup>/s

The Ngongotaha Stream flow gauge was disabled near the peak of this flood. NIWA staff gauged the flow with a flow-meter at the peak, so this value is not derived from a rating relationship. Rotorua District Council collected flood levels at eleven locations following the flood (RDC, 1999). In lieu of contemporary cross sections (from 1999), the same cross sections were used as for the design simulations.

The calibration graph for this event is shown in Figure 5 on page 20, and a calibration summary is included in Table 5 below. To get a reasonable match with the recorded flood levels, surprisingly high channel roughnesses were required. More than half of the length of the channel has Manning's n values greater than 0.110 with some lengths reaching 0.170.

Figure 5 also shows the modelled level for the January 1986 flood for comparison. These channel roughness values (Figure 5) were not used for the design simulations because they represent a channel much constricted by vegetation such as willow and blackberry.

Table 5: Calibration Summary for 1 May 1999 Event

XS name	Chainage m	Recorded		Error m
		Level m	Model Level m	
04X-S 1	70	280.38	280.36	0.02
04X-S 3	225	281.33	280.91	0.42
04X-S 7	672	282.04	282.11	0.07
04XS 10	918	282.54	282.42	0.12
04X/S 24A	1866	284.37	284.41	0.04
04X-S 33	2552	285.31	285.12	0.19
04X-S 39	3006	285.40	285.33	0.07
86xs3287	3427	285.37	285.63	0.26
86xs3367	3507	285.63	285.70	0.07
05xs42b	4723	287.53	287.16	0.37
86xs5440	5580	288.33	288.42	0.09
86xs5710	5850	289.16	289.12	0.05
			<b>average absolute error.</b>	<b>0.15</b>

#### 4.1.3 Event of 5 January 1986 at 44 m<sup>3</sup>/s

Although this is the largest flow on record, the data was not used as the main calibration event. The recorded flood levels were obviously influenced strongly by the then recent flood protection works from the Ngongotaha Road Bridge to the Mouth. These were completed about 12 Months before the flood, and involved widening and deepening of the channel and extensive removal of vegetation. Also there were no recorded flood levels available for the entire reach between Munroe Place and State Highway 5. The 1986 data did verify the May 1999 event model calibration on the reach upstream of Ngongotaha Road.

The effect that the then-recent stream works appeared to have on peak water levels for this event is very marked. This is shown in Figure 5.

Table 6: Calibration Summary for 5 January 1986 Event

XS name	Chainage	Recorded Level L.B.	Recorded Level R.B.	Model Level	Error L.B.	Error R.B.
	m	m	m	m	m	m
84_Peg57	136	280.15	280.15	280.45	0.30	0.30
84_Peg123	225	280.32	280.43	280.55	0.23	0.12
84_PegE	409	280.91	280.99	281.05	0.14	0.06
84_Peg342	538	281.13	281.06	281.32	0.19	0.26
84_Peg407	601	281.00	281.25	281.39	0.39	0.14
84_Peg464	672	281.42	281.47	281.47	0.05	0.00
84_Peg528	721	281.52	281.52	281.53	0.01	0.01
84_Peg659	1010	281.95	282.03	282.13	0.18	0.10
84_Peg717	1090	282.28	282.18	282.24	0.04	0.06
86xs963	1240		282.73	282.93		0.20
86xs1452	1728		285.36	285.55		0.19
86xs1841	2059		285.98	285.93		0.05
86xs1882	2100		286.15	285.97		0.18
86xs5710	5850		290.46	290.25		0.20
					<b>average absolute error</b>	<b>0.15</b>

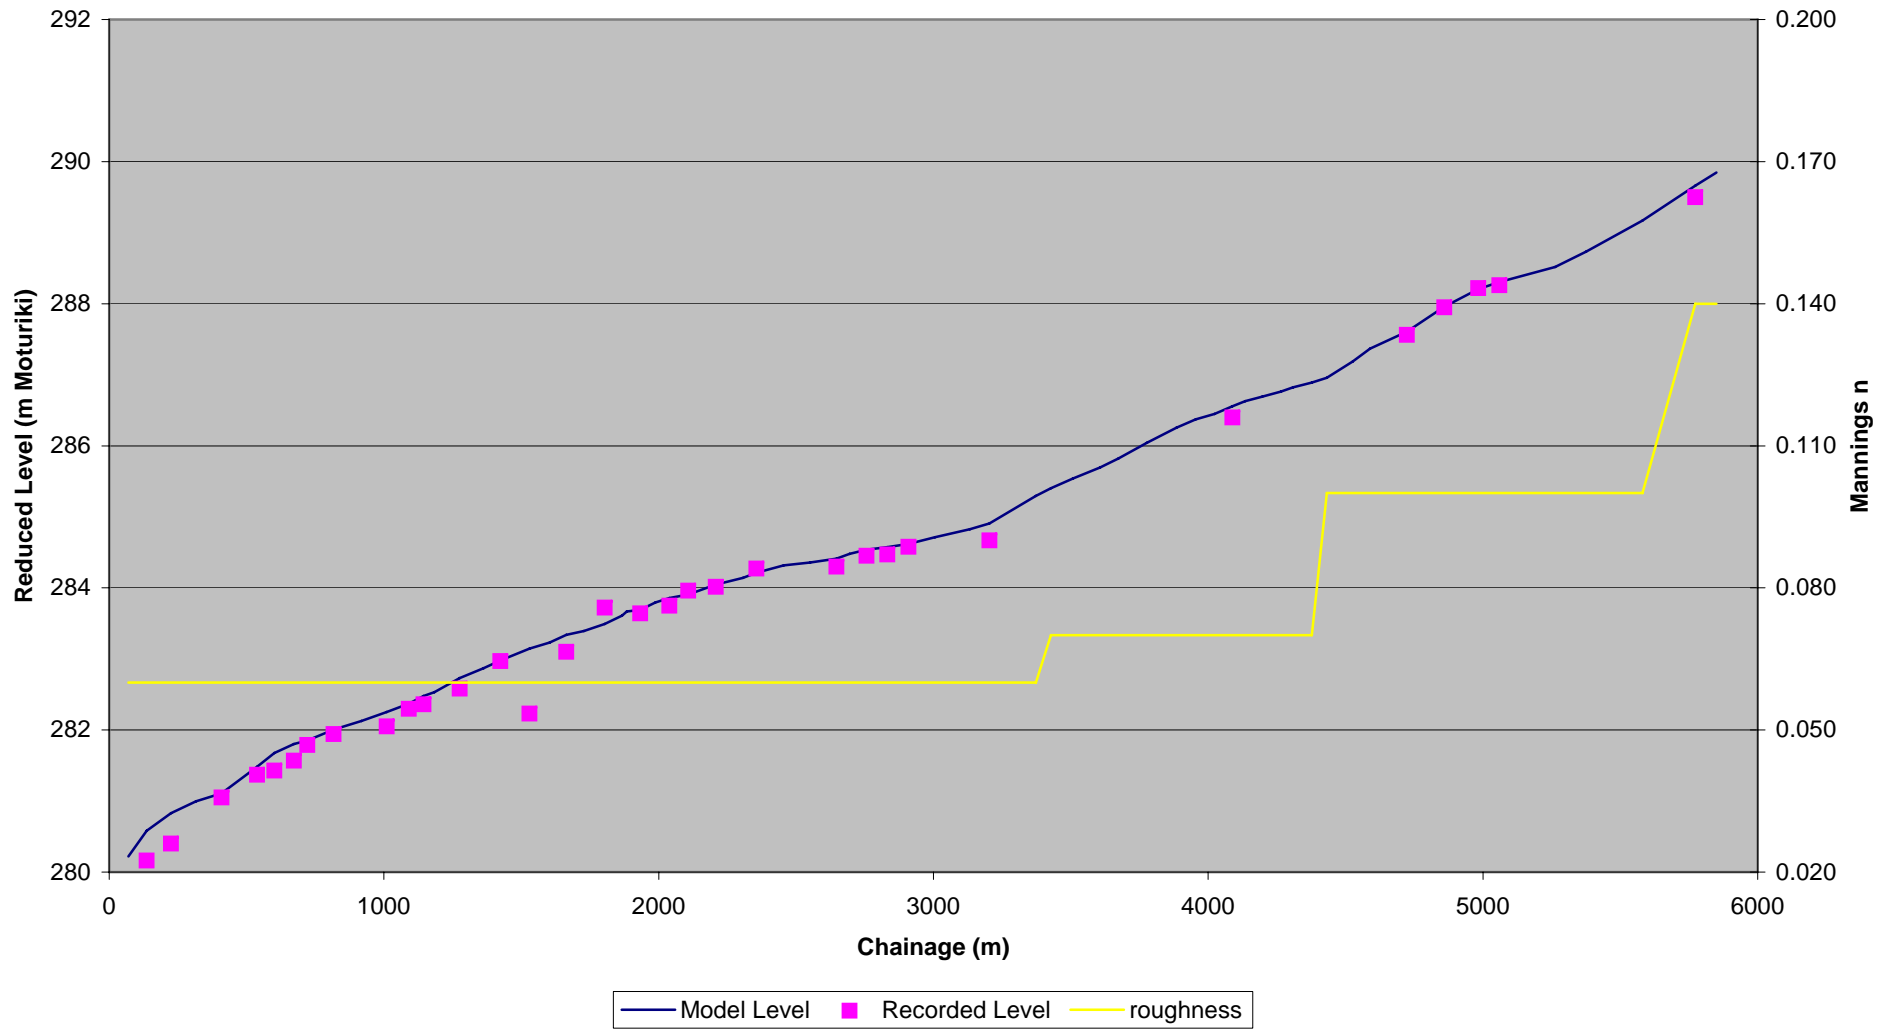


Figure 4: Calibration Graph for 17 December 2005 Event at 33 m<sup>3</sup>/s

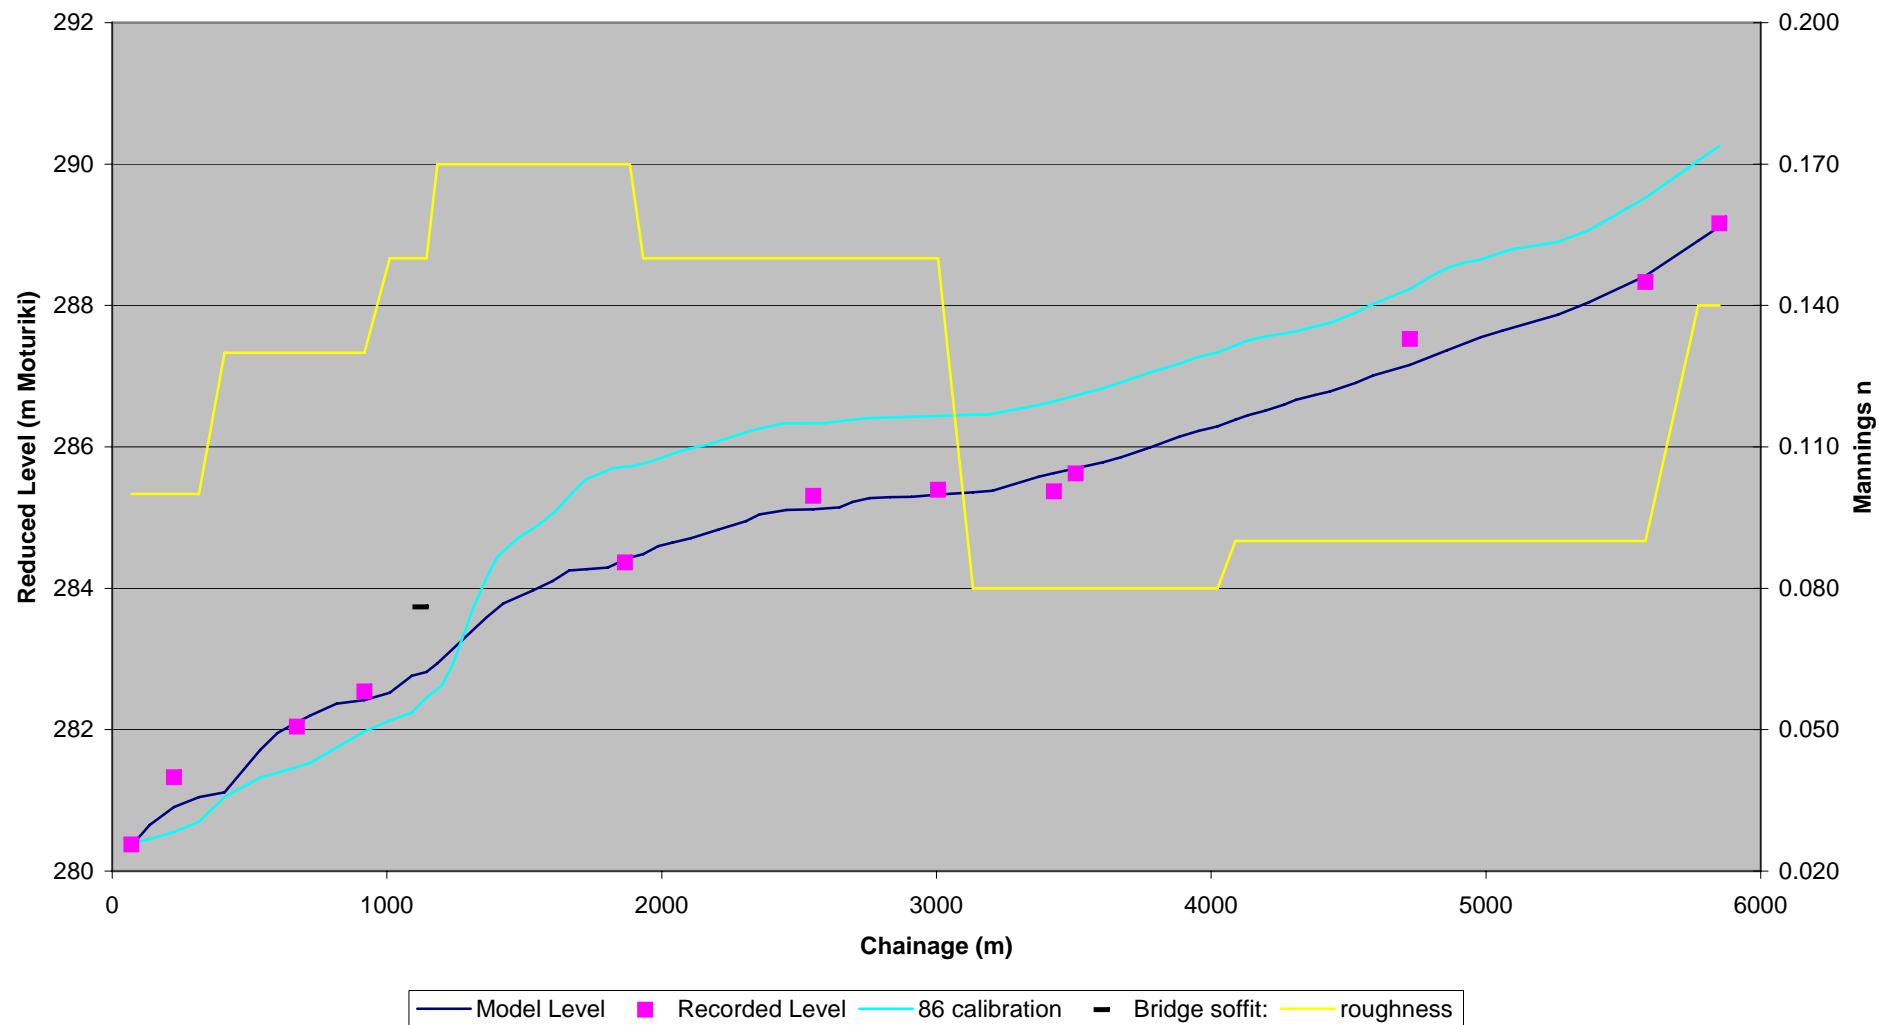


Figure 5: Calibration Graph for 1 May 1999 Event at  $23.46 \text{ m}^3/\text{s}$

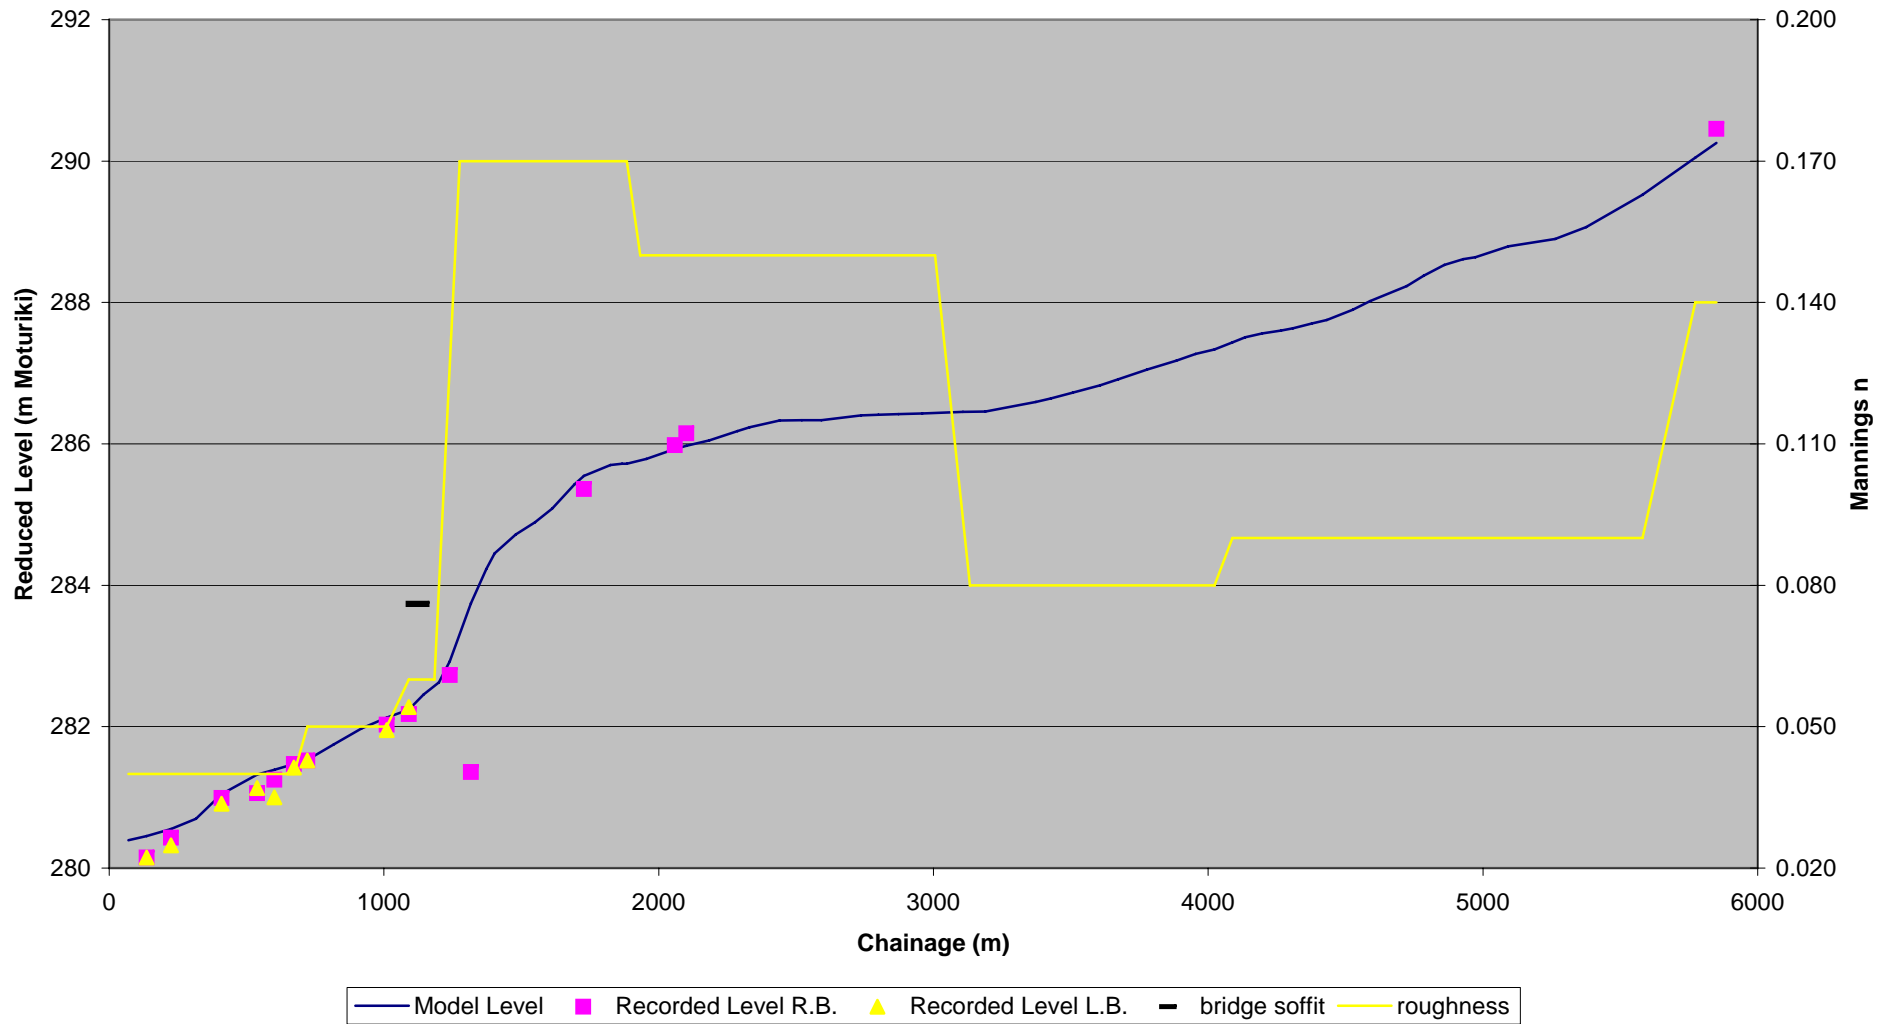


Figure 6: Calibration Graph for 5 January 1986 Event at 44 m<sup>3</sup>/s





## Chapter 5: Results

---

The model results for the design simulations are shown in Table 7 below. The cross section names refer to those shown in Figure 1 on page 7 and Figure 2 on page 9. The values here are given in terms of Moturiki Datum and do not include computational freeboard.

### 5.1 Model outcomes

Figure 7 and Figure 8 on pages 27 and 29 show estimated peak water levels against bank heights during 1% and 2% AEP events for selected reaches. In many locations the natural bank heights may not be fully represented, as the survey cross sections may not have reached the river terrace level.

Floodwaters are not expected to flood Ngongotaha Road, with 0.21 m of clearance to the bridge soffit during a 1% AEP event.

Very few floor levels were found on file for upstream of Ngongotaha Road. The recently built house at 35 Kokiri Street has a consent for 286.0 m R.L.. 1% AEP flood level here is 284.86 m.

### 5.2 Spill potential at Brake Road

A potential spill location has been identified on the Left Bank at Brake Road (chainage 4983). Aerial photos show an historic river channel on the north side of the Left Bank terrace from here downstream to the Western Road Reserve (chainage 1860m). The model indicates that up to 3.0 m<sup>3</sup>/s could spill here during a 1% AEP event. However, if the allowance for computational freeboard – 500mm selected in this case – is explicitly included in the analysis, then the spill flow could reach 15 m<sup>3</sup>/s. That is, if the controlling surface is lowered by the freeboard allowance. A separate simulation was run to test this scenario, whereby the other nearby spilling surfaces – floodways 43FW and 43bFW – were all lowered by the freeboard allowance as well.

The spill flow was assumed to be controlled as for a free overflow weir-type structure, spilling onto Western Road. The simulation may be improved however if downstream effects on the flow path were taken into effect – the weir may be hydraulically drowned by conditions on Western Road, reducing the peak flow rate. Also the flow path and flood levels resulting from the spillage flow have not been investigated. To incorporate either of these considerations would require further site survey.

The results of the Brake Road spilling simulation were also used to assess the effect of this overland flow on peak levels in the main river channel between Brake Road and Western Road Reserve – where it re-enters the channel. The maximum incremental difference with the geometry *AS SURVEYED* (3 m<sup>3</sup>/s 1% AEP spill), was found to be 69mm during a 1% AEP and no effect during a 2% AEP. If the simulation was run with the local weir surfaces reduced by 500mm (15 m<sup>3</sup>/s 1% AEP spill), the greatest incremental effect was 419mm in a 1% AEP and 300mm in a 2% AEP.

The flood levels shown in Table 7 below do not account for any reduction in peak level due to spilling to the Western Road floodplain.

Table 7: Peak Water Level Results from Model Simulations of the Design Events

Name	Chainage	1%AEP_L280.3	2%AEP_L280.3	5%AEP_L280.1	10%AEP_L280.1
	m	m	m	m	m
04xs1	70	280.54	280.51	280.38	280.25
04xs2	136	280.96	280.89	280.73	280.65
04xs3	225	281.36	281.27	281.01	280.91
04xs4a	316	281.55	281.45	281.18	281.07
04xs4b	409	281.62	281.52	281.26	281.17
04xs5	538	282.14	282.04	281.70	281.57
04xs6	601	282.37	282.27	281.91	281.77
04xs7	672	282.56	282.44	282.06	281.90
04xs8	721	282.64	282.52	282.12	281.96
04xs9	817	282.82	282.70	282.30	282.12
04xs10	918	282.91	282.78	282.40	282.23
04xs11	1010	283.05	282.92	282.53	282.36
04xs12	1090	283.20	283.07	282.66	282.48
04xs14	1144	283.53	283.31	282.80	282.60
04xs15	1184	283.55	283.34	282.85	282.65
04xs16	1276	283.71	283.51	283.06	282.86
04xs17	1363	283.92	283.72	283.22	283.01
04xs18	1424	284.06	283.87	283.35	283.12
04xs19	1530	284.26	284.06	283.52	283.30
04xs20	1603	284.33	284.13	283.60	283.38
04xs21	1664	284.47	284.27	283.72	283.49
04xs22	1728	284.52	284.32	283.77	283.54
04xs23	1804	284.56	284.37	283.85	283.63
04xs24a	1866	284.62	284.45	283.96	283.75
04xs24b	1884	284.67	284.51	284.03	283.81
04xs25	1933	284.69	284.53	284.06	283.84
04xs26	1987	284.86	284.69	284.18	283.95
04xs27	2039	284.93	284.75	284.25	284.01
04xs28	2107	284.95	284.79	284.29	284.06
04xs29	2208	285.11	284.94	284.43	284.19
04xs30	2307	285.21	285.04	284.53	284.29
04xs31	2356	285.30	285.13	284.61	284.37
04xs32	2455	285.39	285.22	284.70	284.47
04xs33	2552	285.42	285.25	284.74	284.51
04xs34	2647	285.47	285.29	284.79	284.56
04xs35	2695	285.54	285.36	284.86	284.63
04xs36	2757	285.60	285.42	284.91	284.68
04xs37	2832	285.63	285.45	284.94	284.72
04xs38	2909	285.65	285.48	284.98	284.76

04xs39	3006	285.70	285.53	285.05	284.84
04xs40	3133	285.78	285.61	285.15	284.95
04xs41	3204	285.88	285.71	285.23	285.03
86xs3233	3373	286.39	286.22	285.66	285.43
86xs3287	3427	286.50	286.34	285.77	285.54
86xs3367	3507	286.66	286.50	285.92	285.68
86xs3467	3607	286.85	286.67	286.08	285.84
86xs3533	3673	287.00	286.82	286.23	285.98
86xs3637	3777	287.20	287.03	286.48	286.20
86xs3744	3884	287.37	287.21	286.67	286.41
86xs3814	3954	287.51	287.34	286.80	286.54
86xs3883	4023	287.59	287.42	286.88	286.62
86xs3948	4088	287.70	287.52	286.99	286.73
86xs3995	4135	287.77	287.60	287.06	286.80
86xs4056	4196	287.83	287.66	287.12	286.86
86xs4125	4265	287.86	287.69	287.17	286.92
86xs4168	4308	287.90	287.73	287.21	286.97
86xs4237	4377	287.98	287.81	287.28	287.04
86xs4292	4432	288.05	287.88	287.35	287.11
86xs4386	4526	288.32	288.14	287.59	287.35
86xs4449	4589	288.52	288.34	287.79	287.53
05xs42b	4723	288.84	288.64	288.06	287.78
05xs43b	4859	289.16	288.98	288.44	288.16
05xs43b	4859	289.16	288.98	288.44	288.16
05xs43	4983	289.25	289.08	288.63	288.41
05xs43	4983	289.25	289.08	288.63	288.41
05xs43c	5060	289.37	289.21	288.73	288.51
86xs5122	5262	289.53	289.36	288.89	288.69
86xs5235	5327	289.54	289.38	288.93	288.75
86xs5440	5580	290.24	290.07	289.59	289.35
86xs5633	5773	290.86	290.69	290.09	289.84
86xs5710	5850	291.07	290.90	290.27	290.03



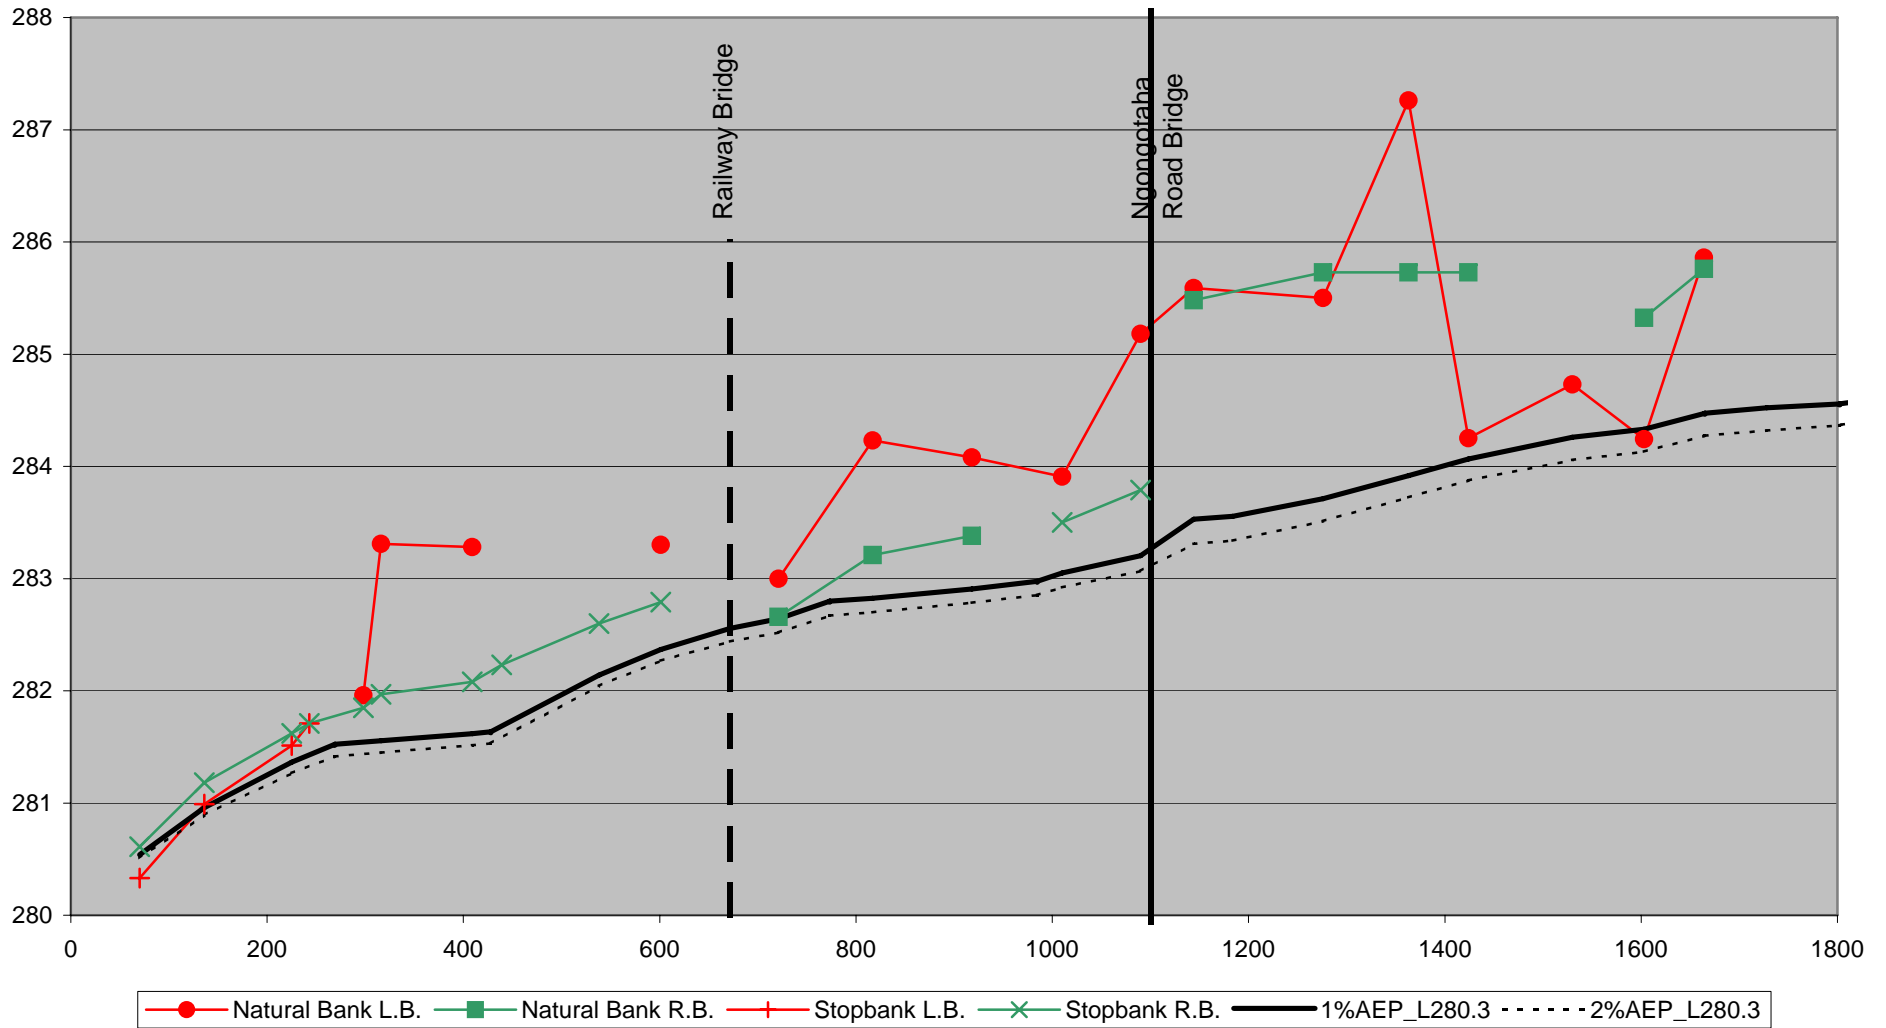


Figure 7: Comparison of estimated flood levels against bank levels for the downstream reaches of Ngongotaha Stream



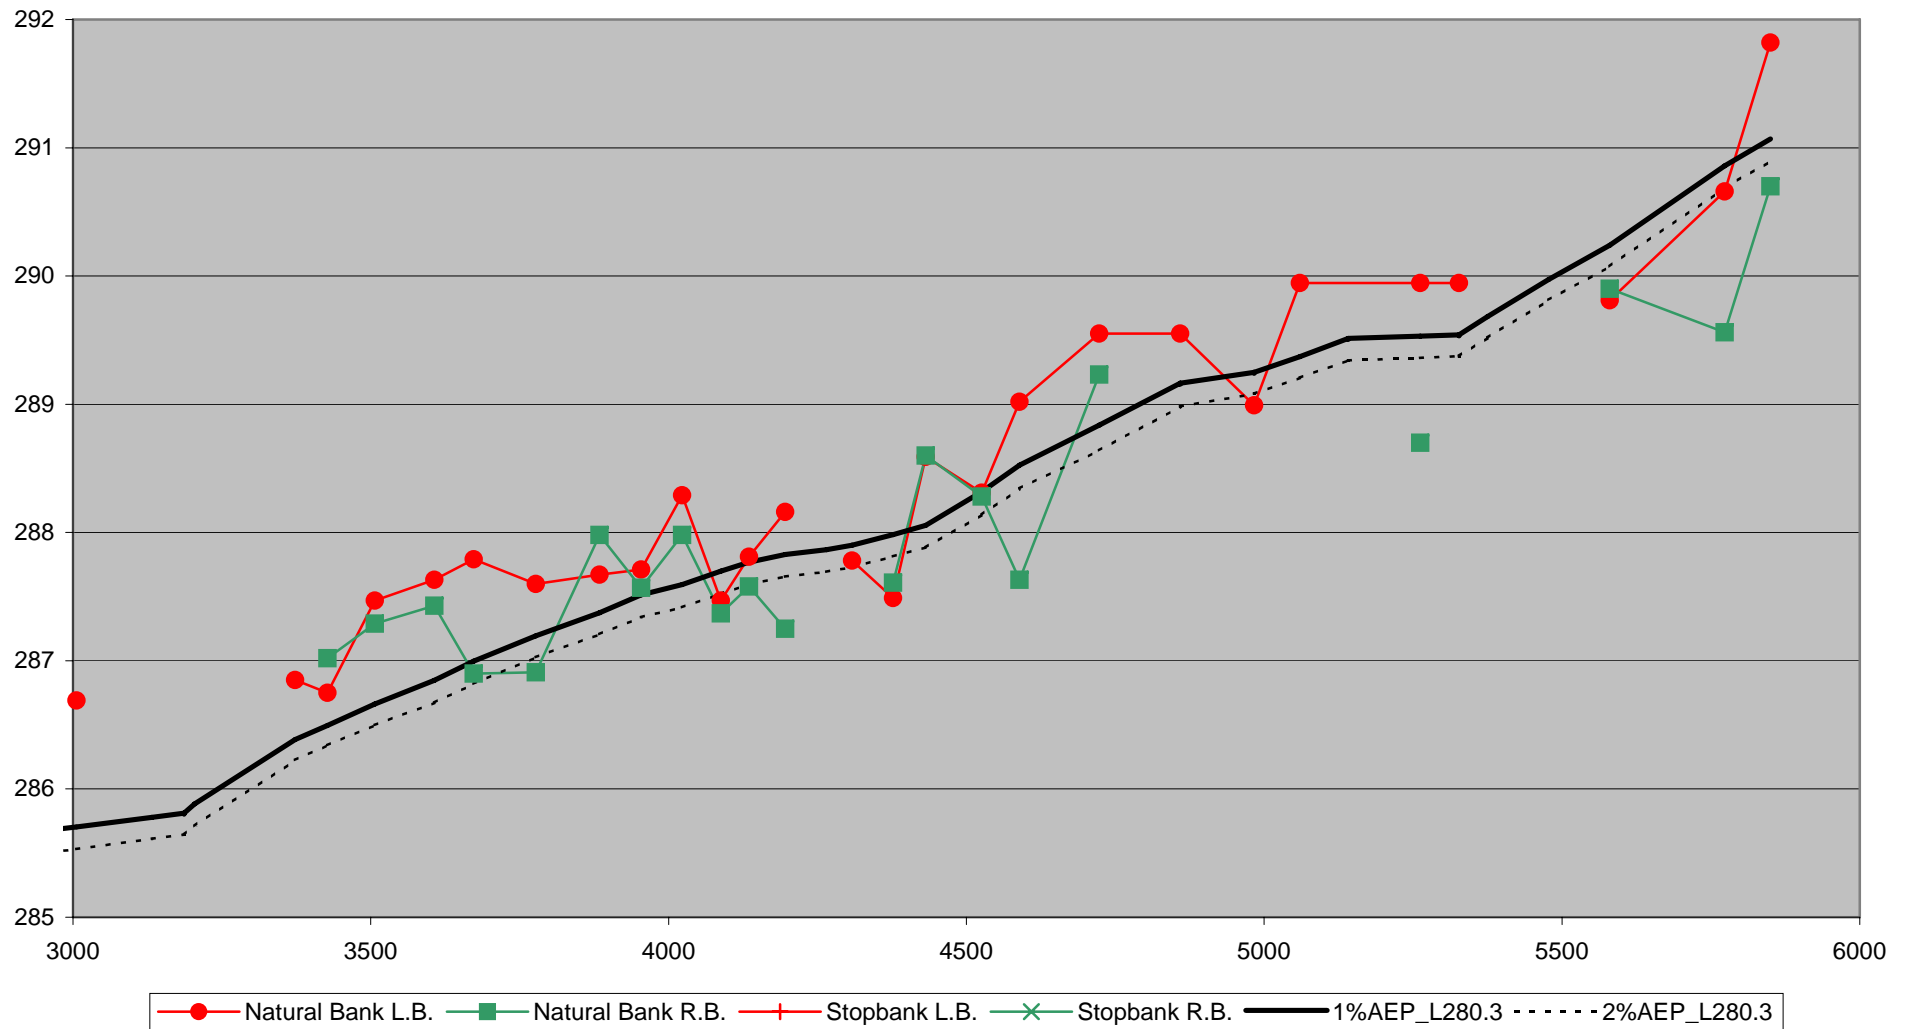


Figure 8: Comparison of estimated flood levels against bank levels for the reaches upstream of chainage 3000m





## References

---

- Barnett Consultants Limited, 1992, Hybrid: Bridge Backwater Calculation Program Users Guide and Documentation
- Bay of Plenty Catchment Commission, Nov 1988, Ngongotaha Stream Works Contract UK9, File No. 146/7/6 (photos of 1986 flood, and contract dates)
- Bay of Plenty Catchment Commission, Scheme Design Drawings, K4465; K4498; K4392;
- Guidelines 2001/04, Hydrological and Hydraulic Guidelines, Environment Bay of Plenty, 2001
- Henderson, F.M., 1966, Open Channel Flow, MacMillan Publishing Company
- Ministry of Works and Development, 1975, Metric Version of Technical Memorandum No.61, National Water and Soil Conservation Organisation
- National Institute of Water and Atmospheric Research Ltd, 1995, High Intensity Rainfall Design System, (Electronic Database)
- Operations Publication 2005/07 2001/01, Environmental Data Summaries, Environment Bay of Plenty.
- Rotorua District Council, file 88 00 014, Recorded Flood Levels from 1/5/99 event
- Survey Level Books: 395, 405, 444, 1986 Cross Section Survey; 352, 1983/84 Cross Section Survey; 697, 696, 2004 Cross Section Survey; 395, 397, 1986 flood levels; Environment Bay of Plenty
- Ven Te Chow, 1964, Handbook of Applied Hydrology, McGraw Hill Book Company
- West, P.M., Ngongotaha Hydraulic Model; Preliminary Results, Internal Memorandum, Environment Bay of Plenty, 21 June 2005